
Raychem

Thermofit® Division Europe

Specification Control Drawing



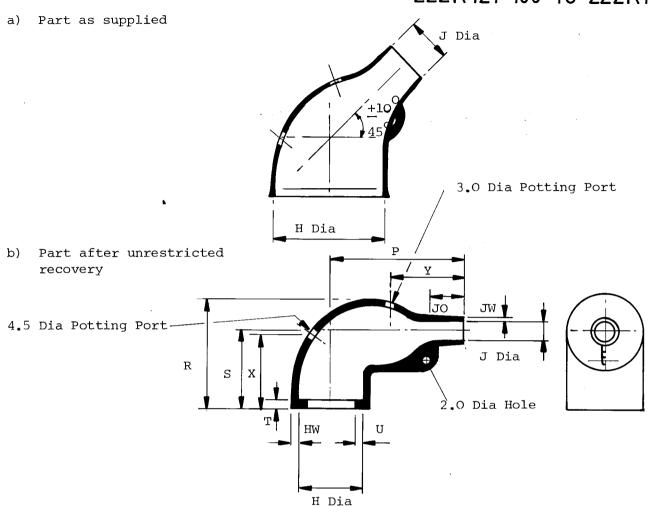

	Dimensions	in	millimetres
--	------------	----	-------------

Part		Н		J	P	R	S	T	U	JO	HW	JW	Х	Y
No.	min a	max b	min a	max b	+10% b	+10% b	+10% b	+10% b	+10% h	+10% b	+20% b	+20% b	+20% b	+20% b
222K121	24	10.4	14	5.6	25	25	19	3.0	1.0	10	1.3	0.5	18	16
222K132	30	14.2	15	5.9	32	27	20	3.0	1.0	10	1.5	0.8	18	20
222K142	31	18.0	18	7.1	39	31	21	3.0	1.0	15	1.8	1.0	18	20
222K152	36	22.4	21	8.4	46	38	26	3.0	1.0	15	1.8	1.0	25	25
222K163	43	28.2	25	9.9	55	45	30	3.0	1.7	16	2.0	1.0	25	30
222K174	52	35.1	39	15.7	80	54	35	3.0	1.7	30	3.3	1.5	25	45
222 K1 85	66	44.5	42	16.8	108	68	42	3.0	2.0	48	3.8	2.0	35	70

Copyright(!) Urheberrechte

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced, or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn M. Rogers Checked

295

Date

Dec '85


Conforms to ISO Recommendations 3rd Angle Projection
Not to scale

Approval Design

MKTG

Q.C.

Ordering Information

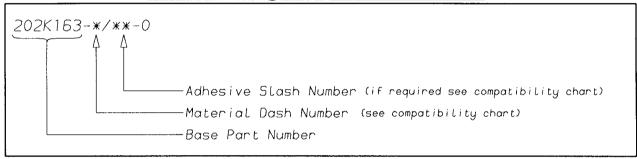

(COMPATIBILITY CHART)

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-12	VITON	N/A
-100	ZERO HALOGEN	/86,/180

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS, WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL WHEN SPECIFIED BY SUFFIX "-00" THEY WILL BE LOCATED AS SHOWN

Raychem Electronics OEM Division Europe Swindon, Wiltshire, England. Telephone: (01793) 528171 Fax: 573923